


**NT2210GK**

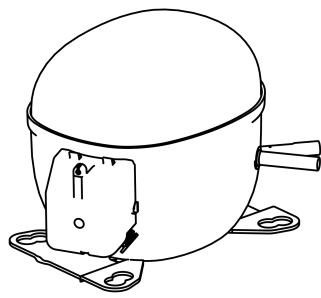

**ENGINEERING CODE**  
923KA02

**REFRIGERANT**  
R-404A

**POWER SUPPLY**  
220-240 V 50 Hz

**APPLICATION**  
LBP

**MOTOR TYPE**  
CSCR

**STANDARD**  
CECOMAF

**COOLING CAPACITY**  
877 W

**EFFICIENCY**  
0.96 W/W



**DATA**

**GENERAL DATA**

Model	NT2210GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	LBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1 1/4
Starting Torque	HST
Plant	SLOVAKIA

**ELECTRICAL DATA**

Start Winding Resistance	3.92 Ω at 25°C
Run Winding Resistance	1.72 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	33 A
Rated Load Amperage (LMBP) at 50 Hz	6.4 A

## MECHANICAL DATA

Displacement	26.21 cm <sup>3</sup>
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17.9 Kg

## ELECTRICAL COMPONENTS

Start Capacitor	88-108 µf/330 V
Run Capacitor	20.0 µf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA2E3C-103
Overload Protection	15HM1962-247 (internal)

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	LBP
Tested Standard	CECOMAF
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

### RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
55	-25	877	0.96	913	-	27.34

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

**PERFORMANCE CURVE**

**Condensing Temperature 35°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	558	1.01	552	-	13.20
-35	765	1.20	638	-	18.15
-30	1017	1.39	730	-	24.23
-25	1316	1.60	825	-	31.48
-20	1661	1.81	918	-	39.92
-15	2050	2.04	1005	-	49.57
-10	2483	2.29	1083	-	60.48

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

**PERFORMANCE CURVE**

**Condensing Temperature 45°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-40	452	0.79	569	-	12.00
-35	624	0.94	663	-	16.64
-30	840	1.09	769	-	22.46
-25	1097	1.24	882	-	29.49
-20	1395	1.40	1000	-	37.75
-15	1734	1.55	1116	-	47.28
-10	2114	1.72	1228	-	58.10

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.


**PERFORMANCE CURVE**

**Condensing Temperature 55°C**

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-30	666	0.85	785	-	20.64
-25	877	0.96	913	-	27.34
-20	1126	1.07	1049	-	35.33
-15	1411	1.19	1190	-	44.64
-10	1733	1.30	1332	-	55.27

Test Condition: Subcooling 0 K, Return Gas 32 °C. Data are an indication of performance based simulation.

## ENVELOPE

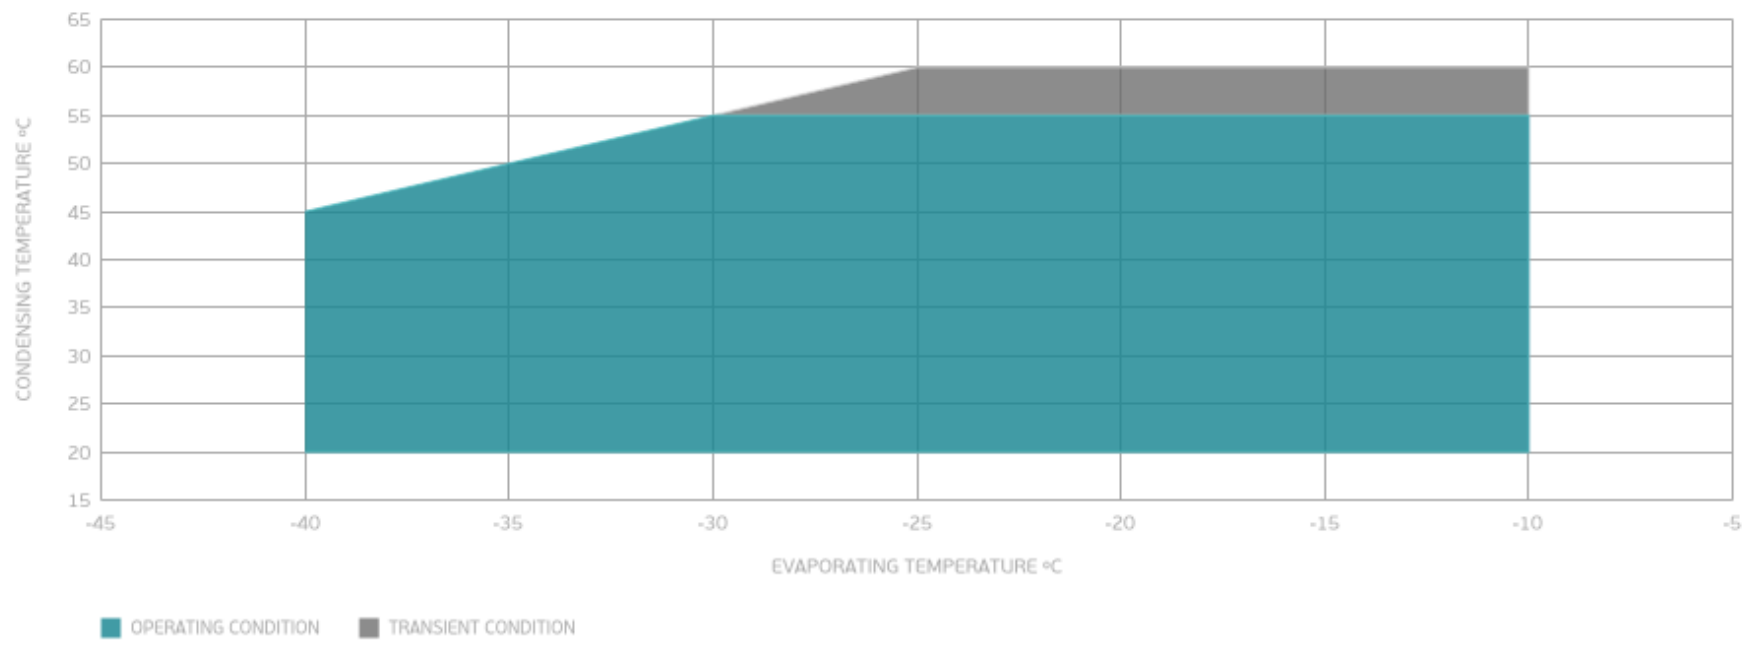

## External

### EXTERNAL CHARACTERISTICS

Base Plate UNI

Tray Holder NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

### EXTERNAL DIMENSIONS

