


NT6226GK

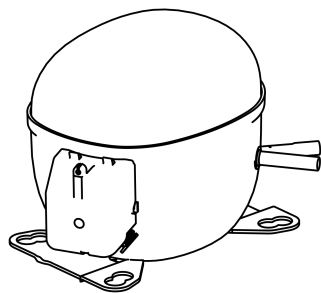

ENGINEERING CODE
923BG02

REFRIGERANT
R-404A

POWER SUPPLY
115 V 60 Hz

APPLICATION
MBP

MOTOR TYPE
CSCR

STANDARD
AHRI

COOLING CAPACITY
2433 W

EFFICIENCY
1.85 W/W



<https://radarbali.jawapos.com/ekonomi/707314137/tips-memilih-es-batu-kristal-yang-higienis-untuk-kebutuhan-harian-dan-usaha>

DATA

GENERAL DATA

Model	NT6226GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/115
HP	1+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	2.39 Ω at 25°C
Run Winding Resistance	0.35 Ω at 25°C
Locked Rotor Amperage (LRA) 60Hz	77 A

MECHANICAL DATA

Displacement	22.37 cm ³
Oil Charge	450 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	17.5 Kg

ELECTRICAL COMPONENTS

Start Capacitor	243-292 µf/250 V
Run Capacitor	40.0 µf/400 V
CSR CSIR BOX	Yes
Starting Device Description	RVA2AE3D-660
Overload Protection	UP14LA3105 (internal)

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	AHRI
Tested Cooling	Fan
Tested Voltage	115 V
Max Refrigerant Charge	800 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
43.3	-6.7	2433	1.85	1314	-	72.76

Test Condition: Subcooling 0 K, Return Gas 18.3 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1638	1.75	937	-	42.90
-15	2023	1.96	1035	-	53.55
-10	2468	2.15	1148	-	65.85
-5	2975	2.35	1267	-	80.16
0	3548	2.57	1380	-	96.85
5	4191	2.84	1477	-	116.26
10	4907	3.17	1547	-	138.75

Test Condition: Subcooling 0 K, Return Gas 18.3 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1356	1.34	1012	-	40.47
-15	1691	1.53	1109	-	50.97
-10	2076	1.68	1233	-	63.14
-5	2512	1.83	1375	-	77.36
0	3005	1.97	1523	-	93.97
5	3557	2.14	1666	-	113.33
10	4173	2.33	1794	-	135.81

Test Condition: Subcooling 0 K, Return Gas 18.3 °C. Data are an indication of performance based simulation.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1674	1.33	1256	-	60.23
-5	2033	1.45	1403	-	74.27
0	2438	1.55	1568	-	90.74
5	2892	1.66	1739	-	109.99
10	3401	1.78	1907	-	132.37

Test Condition: Subcooling 0 K, Return Gas 18.3 °C. Data are an indication of performance based simulation.

ENVELOPE

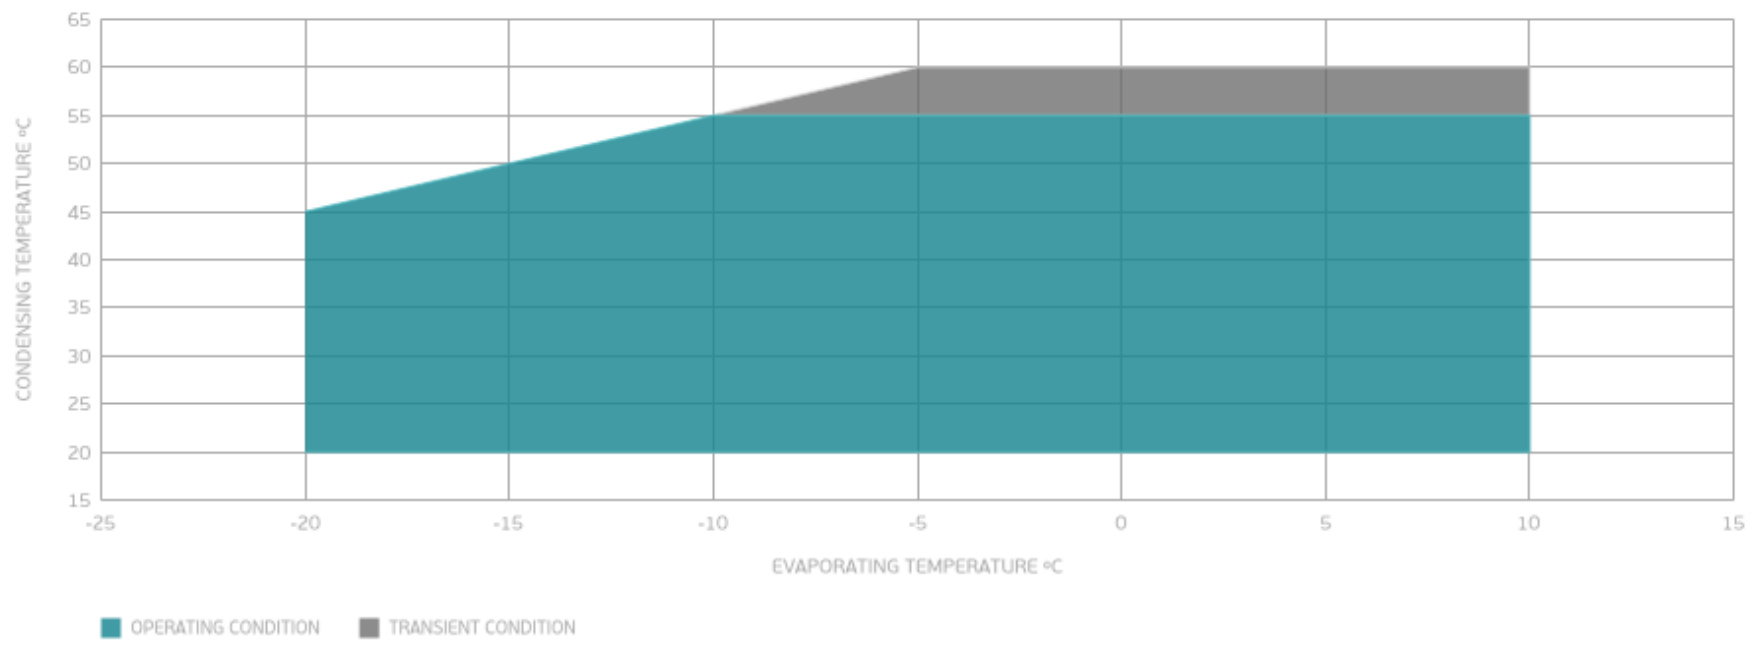

External

EXTERNAL CHARACTERISTICS

Base Plate

UNI

Tray Holder

NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

EXTERNAL DIMENSIONS

